# FOYER AX B 900 POST-COMBUSTION

**Standard NF – EN 13229 Guaranteed by C.T.I.F.**
**Type : I.S.B. SF. EM**

*Les foyers verts*

- nominal power : **13 kwh**
- consumption : 5.20 Kgh
- appliance Co : **0,14%**
- appliance efficiency : **66.5 %**
- % of losses by non burning solids : 0
- Autonomy of heater => 10 H 00 am with inertia of the fireproof
- Autorized fuel : wood to 15 % of humidity

## CONDITION OF EXPLOITATION

- imperative fresh inflow of air : 300 $cm^2$ minimum
- inflow of air convection : 600 $cm^2$ minimum, so necessary to kick away the detachable opercules.
- Hot air outlets : 647 $cm^2$ minimum

## STANDARD EQUIPEMENTS

- order of valve exhaust of smoke with automatic opening when the door lift up
- careenage of door
- dubbing of convection
- directional and detachable inflows of fresh air
- removable feet
- smoke evacuation Ø 230 – hot air outlets Ø 125 *( 4 )*

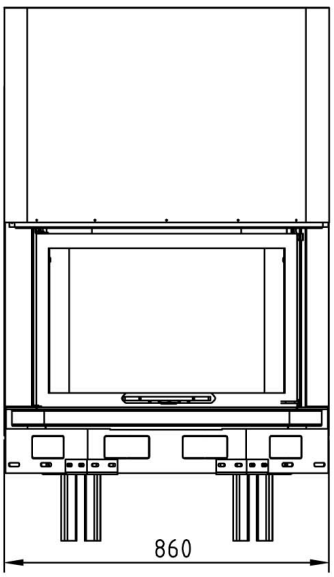


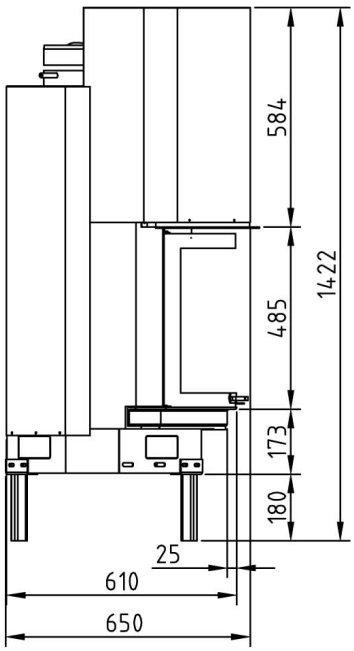


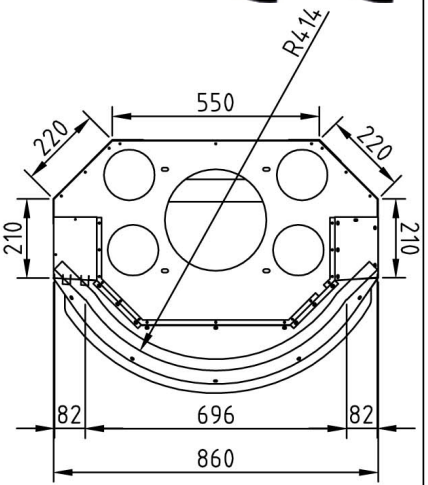


Echelle : 1/20
Weight : 260 Kg

AXIS : ZA La Pélissière – 01300 BELLEY FRANCE
Tél : 33 (0)4 79 81 10 50 – Fax : 33 (0)4 79 42 21 24
Email : mbondot@aol.com / Site internet : www.cheminees-axis.com